

## Portable Access Mats and Temporary Flooring

Protect the event grounds and personnel when setting up an event on uneven ground and muddy locations. Wet or unsteady ground can hazardous work environment for your team or leave your event in disarray after a shower or storm as equipment or event vehicles sink into mud or pathways get washed out. Fortunately, Signature Systems Group provides DuraDeck®, a portable, lightweight composite matting system designed specifically to provide accessways and platforms for vehicles, equipment, and staging.

DuraDeck® semi-permanent composite mats are robust enough to handle loads up to 80 tons, yet flexible enough that they follow the contours of the terrain without breaking or cracking. From the Everglades to the Sahara, DuraDeck® is perfectly at home in any environment. These mats are able to handle extreme hot and cold temperatures and are weather resistant, providing a clean surface for any event.

### CONTACT US

Direct +1 972.684.5736 | [signaturecorp.com](http://signaturecorp.com) | [sales@signaturecorp.com](mailto:sales@signaturecorp.com)

**EASY TO SHIP**

4 ft (122 cm)  
8 ft (244 cm)

500 DuraDeck sheets can be loaded in a standard US tractor trailer or 40 ft HC ISO container

### Traction Varieties to Suit Your Worksite

**DuraDeck 1:** Rugged traction on both sides. Ideal for creating a temporary roadway over several types of terrain and surfaces.

**DuraDeck 2:** Rugged traction on one side, pedestrian friendly, textured surface on the other. Perfect for pedestrian pathways or a platform.



**DuraDeck 1:** Rugged traction on both sides. Ideal for creating a temporary roadway over most terrains.



**DuraDeck 2:** Rugged traction on one side, textured surface on the other. Perfect for pedestrian walkways.

### Features and Benefits

- Portable and durable enough for years of use and hundreds of projects
- Less expensive than fiberglass and more cost-effective than plywood
- Will not rot or splinter
- Protects vehicles & equipment from excessive wear and damage due to unstable ground conditions
- Surface traction prevent slippage and provides added personnel safety
- Saves time and labor costs, increasing efficiency
- Eliminates environmental cross-contamination problems associated with plywood sheets
- Guaranteed for 7 years

## SPECIFICATIONS

### Module Size

4 ft x 8 ft x ½ in (122 cm x 244 cm x 1.3 cm). Other sizes available.

### Material


Black High-Density Polyethylene (HDPE) post-industrial recycled plastic, naturally UV resistant due to the carbon black used for color. Beige mats also available.

### Weight

87 lbs (40 kg) per mat – 2.8 lbs/ft<sup>2</sup> (13.5 kg/m<sup>2</sup>)

### Weight Load

Up to 80 tons depending on sub-surface

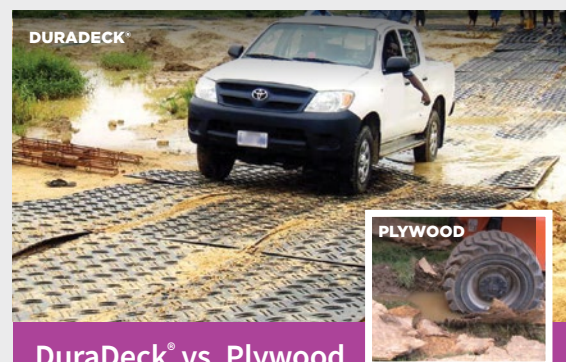

### DuraDeck® vs. Plywood

DuraDeck® stands up to the elements. Plywood cracks under pressure.

### CONTACT US

Direct +1 972.684.5736 | [signaturecorp.com](http://signaturecorp.com) | [sales@signaturecorp.com](mailto:sales@signaturecorp.com)